




DIRECT-ACTIVATED PRESSURE REDUCING VALVE (Stainless Steel 316)

- ▶ Valve Body is made by Stainless Steel #316, suitable for fluid, air and steam.
- ▶ The gate is balanced-pressure designed, which will not influence the outlet pressure caused by unstable inlet pressure.
- ▶ When the outlet pressure responds directly to the pressure control chamber and adjusts the setting pressure, it responds quickly and adjusts the pressure accurately.
- ▶ Design of piston and diaphragm improves the inability of sustaining pressure and leakage.



- ▶ Pressure Adjusting Range : 1 ~ 6 kgf/cm²
4 ~ 10 kgf/cm²
8 ~ 13 kgf/cm²
- ▶ Pressure needed from fully-closed gate to fully-opened gate : 1.5 kgf/cm² (1 kgf/cm² = 14.2 psi)
- ▶ Applied Temperature : -15 ~ 100°C
100 ~ 180°C (For steam)
- ▶ Valve Body Testing Pressure : 35 kgf/cm²
- ▶ Maximum Applied Pressure : 25 kgf/cm²

No	Part Name	Material
1	Gauge	Stainless Steel
2	Upper Cover	Stainless Steel 316
3	U-ring	NBR / Viton
4	Piston	Stainless Steel 316
5	Sealing Spacer	NBR / Viton / Teflon
6	Shaft	Stainless Steel 316
7	Main Body	Stainless Steel 316
8	Diaphragm	NBR / Viton
9	UH-ring	NBR / Viton
10	Spring	Spring Steel
11	Lower Cover	Stainless Steel 316
12	Washer	Brass
13	Adjusting Stem	Stainless Steel 304

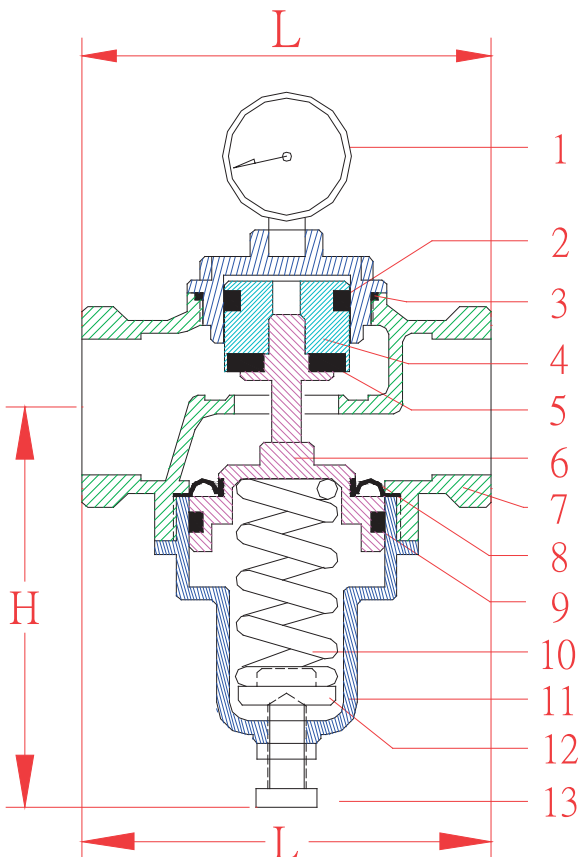

(Thread end)

Item No	Size	H(mm)	L(mm)	Weight(kg)	CV
RET15-S	1/2"	80	70	0.8	2.4
RET20-S	3/4"	105	85	1.0	9.0
RET25-S	1"	105	92	1.1	11.0
RET40-S	1 1/2"	130	115	2.2	21.0
RET50-S	2"	130	120	3.1	25.0

(Flange Type)

Item No	Size	H(mm)	L(mm)	Weight(kg)	CV
REF15-S	1/2"	85	150	2.0	2.4
REF20-S	3/4"	105	150	2.8	9
REF25-S	1"	105	150	3.5	11
REF40-S	1 1/2"	130	190	5.9	21
REF50-S	2"	130	190	6.5	25
REF65-S	2 1/2"	185	210	11.5	75
REF80-S	3"	185	225	12.0	80
REF100-S	4"	230	250	19.0	120
REF150-S	6"	290	310	45.0	250