




Ver. J, Model U-T8

Y-Spring Check Valve
Threaded End, Full Port
 800 PSI
 1/4" (DN8) to 2" (DN50)

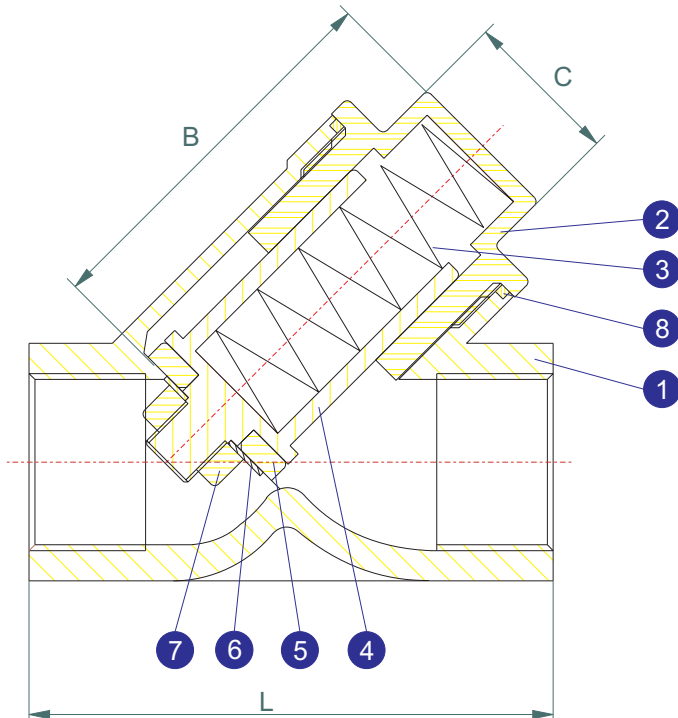

MIN. PRESSURE TO OPEN (mBAR)

SIZE	mBAR
1/4"	30
3/8"	30
1/2"	30
3/4"	32
1"	32
1 1/4"	35
1 1/2"	35
2"	40

MATERIALS LIST

NO.	PART NAME	MATERIAL	Q'TY
1	Body	ASTM A351 Gr.CF8M	1
2	Cap	ASTM A351 Gr.CF8M	1
3	Spring	SUS304	1
4	Disc	SUS316	1
5	Seat	PTFE	1
6	Washer	SUS304	1
7	Nut	SUS304	1
8	Gasket Packing	PTFE	1

DIMENSIONS (mm)

SIZE	DN	L	B	C
1/4"	8	65	46	19
3/8"	10	65	46	19
1/2"	15	65	46	19
3/4"	20	80	58	23
1"	25	90	69	27
1 1/4"	32	105	75	32
1 1/2"	40	120	85	41
2"	50	140	98	50