

40 BAR STAINLESS STEEL Y-SPRING CHECK VALVES




Y-SP

- Investment Casting
- Screwed-In Cap
- Y-Type
- S.S. 316 Piston Disc
- Connecting Threads:
ANSI B2.1
BS21
DIN
- Working Pressure: 40 bar
- Working Temp.: -20°C ~ 160°C
- Size: 1/4 in ~ 3 in

MATERIAL

NO	PARTSNAME	SPECIFICATION	Q,TY
1	BODY	ASTM A-351 GR.CF8M	1
2	CAP	ASTM A-351 GR.CF8M	1
3	SPRING	SUS 304	1
4	DISC	SUS 316	1
5	SEAT	PTFE	1
6	WASHER	SUS 304	1
7	NUT	SUS 304	1
8	GASKET PACKING	PTFE	1

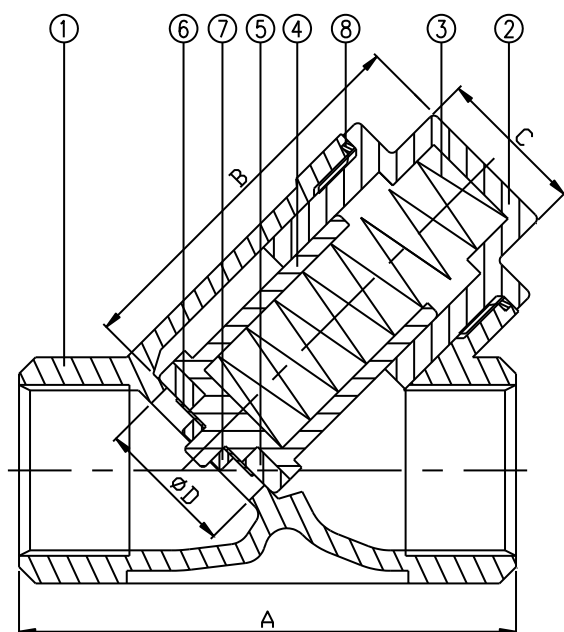

DIMENSIONS(mm)

SIZE	A	B	C	D
1/4	65	46	19	11
3/8	65	46	19	13
1/2	65	46	19	15
3/4	80	58	23	20
1	90	69	27	25
1 1/4	105	75	32	32
1 1/2	120	85	41	38
2	140	98	50	50
2 1/2	170	121	58	65
3	200	134	58	80